




PRODUCT *Instructions*

KN400 Series - Elora Gooseneck Tub Filler

Elora

KN400 SERIES

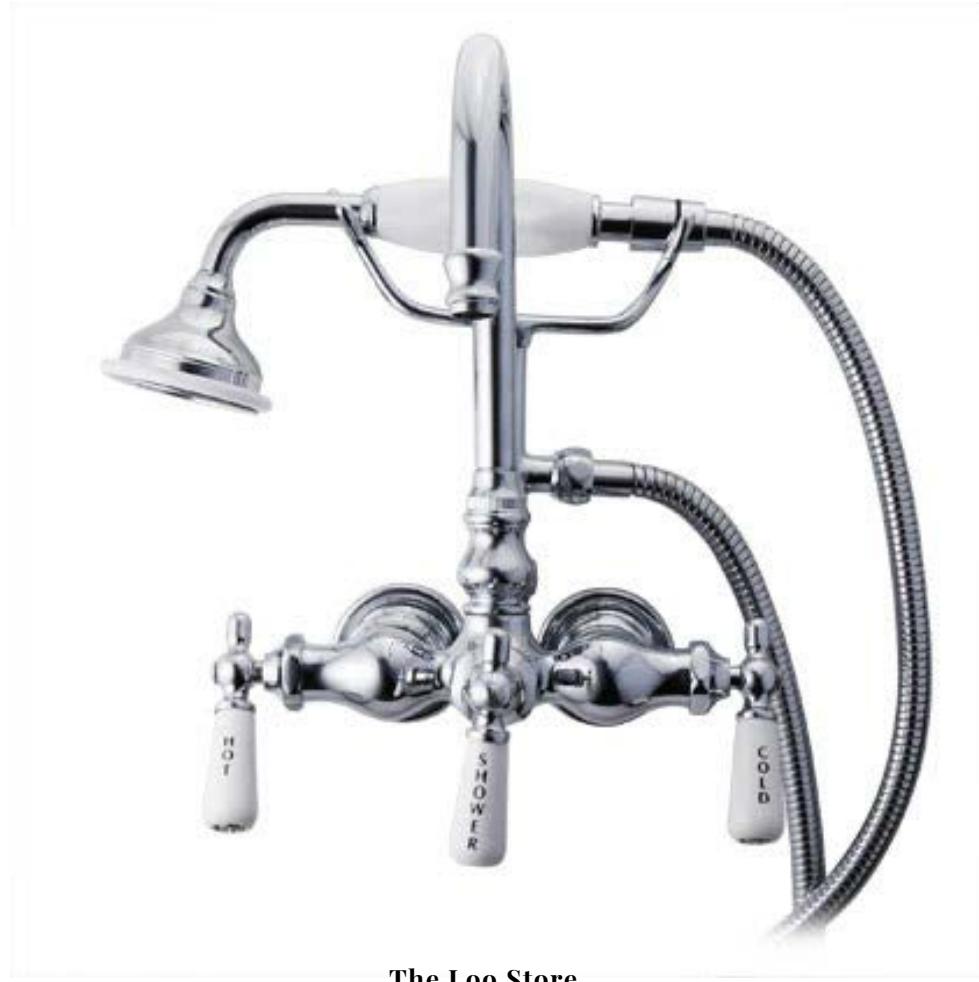

The Loo Store



Grimsby, Ontario, Canada

1-877-290-3445

info@thelostore.com

www.thelostore.com

KN400 Series - Elora Gooseneck Tub Filler

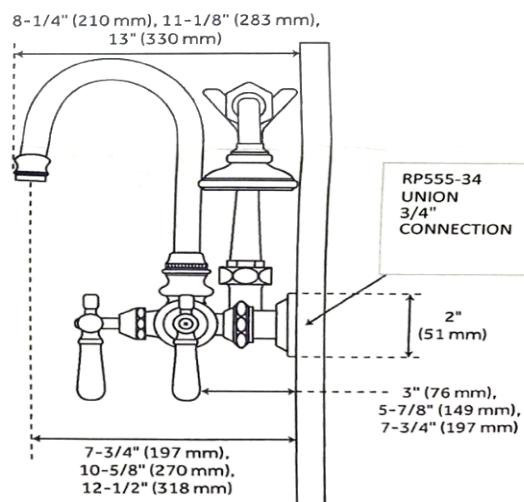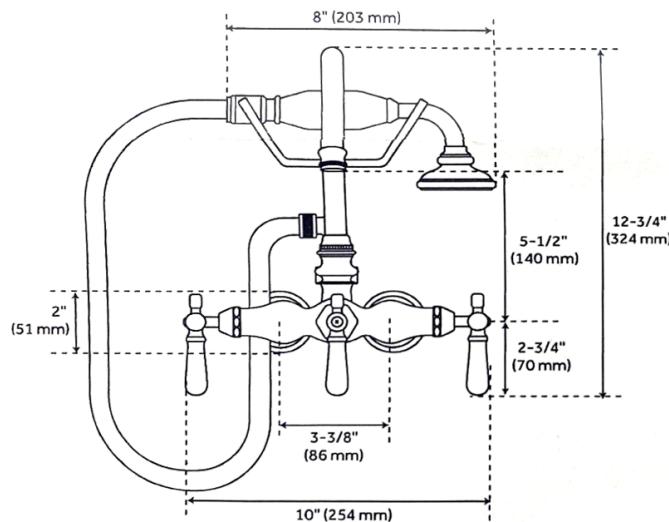

Care and Maintenance

Minimum maintenance is required to maintain product finish. With proper maintenance your Rubex faucet will continually look like new. Special care should be taken when cleaning your faucet and the following suggestions will help extend your faucet life

- A. Cleaning should be done regularly using a soft cotton cloth and warm water; then towel dry
- B. Do not use cleaners that contain abrasives or harsh chemicals; care should be taken in selecting cleaning supplies. Many cleaners contain detergents, ammonia, or other corrosive solvents that could damage your faucet finish.
- C. Occasionally clean with a non-abrasive wax polish

Warranty

Kanrep Norris warrants the original purchase for a LIMITED LIFE TIME from original purchase that the product will be free of any manufacturing defects. Product will be replaced at no charge provided it has been installed in accordance to the attached installation instruction, used as recommended and not damaged due to misuse, abuse, faulty maintenance, accident, or other damage. Kanrep Norris is not responsible for replacement labour costs, or shipping charges, or damage incurred during installation, transportation, removal, repair, or replacements. All warranty claims are to be made to info@kanrep.ca and shall be accompanied by the original purchase receipt and photographs of the damage.

Installation Instructions

Note: In order to comply with CSA regulation B125; Faucet must be installed so spout outlet is not less than 1" above lip of tub.



Installation:

We recommend consulting a professional if you are unfamiliar with installing bathroom fixtures and plumbing. Kanrep Norris Plumbing Dist. accepts no liability for any damages to the floor, walls, plumbing or for personal injury during installation.

Remove lock nuts from the back of faucet and insert faucet through mounting holes in tub.

Hand-tighten washers (if included) and hex nuts to secure.

Check to make sure faucet is properly aligned and adjusted as needed. When faucet is in the proper position, finish tightening the hex nuts with your adjustable wrench.

Attach the hot & cold water feed tubes to the water inlets on the back of faucet. Tip; Use plumber's tape on hose & pipes before you attach supply lines to ensure leak free connection.

Finish your installation by attaching any hoses or handle that might be included.

After all connections have been made, turn on the water supply, check to make sure that all connections are tight (no water should be leaking) and that hot & cold supplies are working correctly. turn the faucet on and allow the water to

recommended water supplies

Use 5576VX supplies with shut off

